




Connectors System AC 164 Plug and Socket Connectors Flat Version

AC 164 BUF/ 5 PB ZEL WS

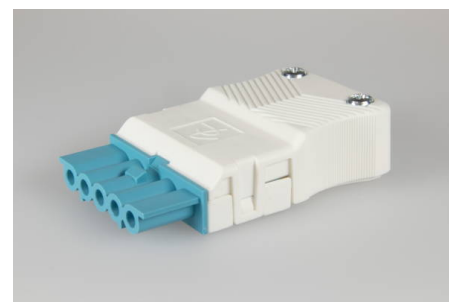

Order Info

| | |
|-----------------------------|---------------|
| reference number (ref. no.) | 147415 |
| PU | 100 |
| EAN | 4028012117307 |

Type

| | |
|---------------------------------------|-------------------|
| Type | socket |
| connection type | screw |
| number of poles | 5 pole |
| coding | 2 (DALI) |
| colour | pastel blue white |
| protection against incorrect plugging | yes |
| PE-function | yes |
| latch | yes |

Electrical Data

| | |
|-----------------------|-------------|
| rated voltage | 250 / 400 V |
| rated voltage (UL) | 600 V |
| rated current | 16 A |
| rated current (UL) | 16 A |
| rated impulse voltage | 4.0 kV |

Connection Data

| | |
|---------------------------|--------------------------------|
| cross-section rating | 2.5 mm ² |
| cross-section rating (UL) | 16 AWG |
| clamping range | 0.5 - 2.5 mm ² |
| sheathing cable diameter | 6.5 - 11.8 mm |
| type of conductor | fine stranded, stranded, solid |
| stripping length | 7.0 mm |
| dismantling length | 26.0 mm |
| dismantling length PE | 33.0 mm |
| clamping units per pole | 1 |
| contact screw assembly | PZ 1 / ⌀ 0.5 Nm |
| strain relief assembly | PZ 1 / ⌀ 0.5 Nm |

Ambient Conditions

| | |
|---|-------|
| T_{max} ambient air (at rated current) | 70 °C |
| IP Code acc. to EN 60529 | IP20 |
| IP Code when plugged | IP40 |

Materials

| | |
|--|-------|
| insulator material | PA |
| contact material | brass |
| flammability rating acc. to UL 94 | V-2 |

Approvals

| | |
|-------------------------|-----|
| acc. to EN 61535 | yes |
| acc. to UL | yes |

Accessories

| | |
|-------------------------|-------|
| AC 164 VT 3/5 PB | 23053 |
|-------------------------|-------|