




## Fused Terminal Blocks

### ABK 503/ 2 GW

#### Order Info

reference number (ref. no.)	193812
PU	200
EAN	4028012138005

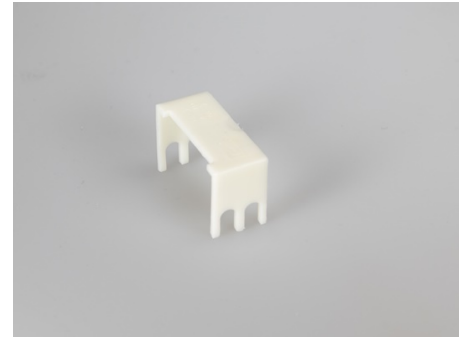

#### Type

Type	cover
number of poles	2 pole
colour	naturalal

#### Ambient Conditions

T <sub>max</sub> ambient air (at rated current)	85 °C
---	-------

#### Materials

insulator material	PA GW
flammability rating acc. to UL 94	V-2