




LEDtrack Row Lighting System
LEDtrack through-wiring

LEDtrack REEL/ 5 525 150 1P A75 C75
GEN2

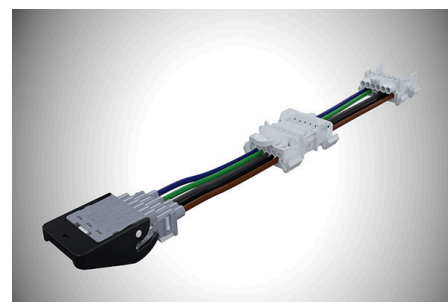

Order Info

| | |
|-----------------------------|-------|
| reference number (ref. no.) | 27012 |
| PU | 10 |

Type

| | |
|--------------------|---------------------|
| core cross-section | 2.5 mm ² |
| total length | 1.50 m |
| cable type | H07V2-U |
| number of poles | 5 pole |
| PE-function | yes |
| latch | yes |

Electrical Data

| | |
|-----------------------|--------|
| rated voltage | 400 V |
| rated current | 16 A |
| rated impulse voltage | 2.5 kV |

Connection Data

| | |
|-------------------|------------|
| type of conductor | solid |
| fixing | catch wing |

Ambient Conditions

| | |
|-------------------------------------------------|-------|
| T _{max} ambient air (at rated current) | 70 °C |
| IP Code when plugged | IP20 |

Materials

| | |
|-----------------------------------|-----|
| flammability rating acc. to UL 94 | V-2 |
|-----------------------------------|-----|

Approvals

Accessories

| | |
|--------------|--------|
| LEDtrack ABK | 159901 |
|--------------|--------|